


# ACCESS

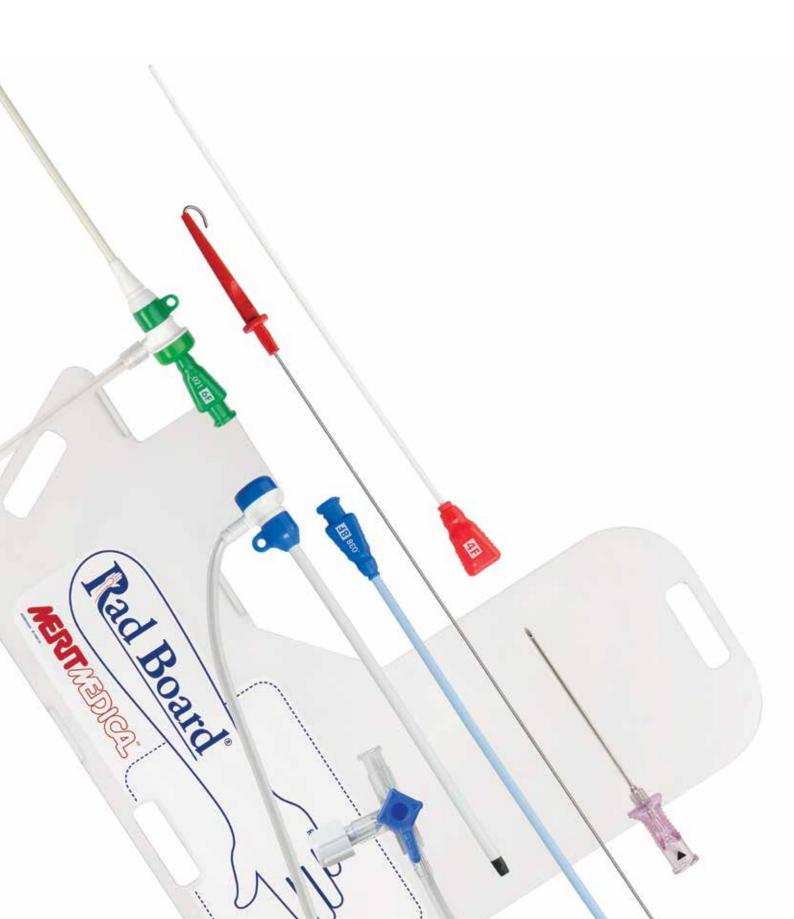

#### **RADIAL APPROACH ACCESSORIES**

Rad Board <sup>®</sup> Radial Arm Board	3
Rad Board Accessories	3-4
Rad Board Xtra™	3
Rad Trac®	4
Rad Rest <sup>®</sup>	4

### **NEEDLES & SCALPELS**

Merit Advance <sup>®</sup> Angiographic Needles	5
SecureLoc <sup>®</sup> Safety Introducer Needles	7
Futura <sup>®</sup> Safety Scalpels	8

#### SHEATH INTRODUCERS

PreludeEASE <sup>™</sup> Hydrophilic Sheath Introducers	9
Prelude <sup>®</sup> Radial Sheath Introducers - Mini Access	10
Prelude PRO <sup>™</sup> Sheath Introducers	11
Prelude Sheath Introducers with Merit Advance® Needle	12
Prelude Sheath Introducers 11cm	13
Prelude Sheath Introducers 23cm	14
Prelude ACT <sup>™</sup> Sheath Introducers	15

# **OBTURATORS & GUIDE WIRES**

Prelude Obturators	16
Prelude Guide Wires	16

## RAD BOARD<sup>®</sup> & ACCESSORIES

The Rad Board and Accessory Products provide support for radial access procedures and optimise the efficiency of radial procedures by streamlining and standardising setup.

#### RAD BOARD® RADIAL ARM BOARD

The Merit Medical Rad Board is a rigid PVC board used to provide support for a patient's arm during a radial or similar procedure. The Rad Board contains a thin layer of Xenolite<sup>®</sup>\* TB (15" x 9"/38 cm x 23 cm) to provide additional protection against radiation scatter. The Rad Board is the only arm board that offers radiation scatter protection<sup>1</sup>. The dotted lines on the product logo label indicate the position of the Xenolite TB layer. The Rad Board is reversible, reusable, and non-sterile. Sold individually.

#### Catalogue Number RB100

<sup>1</sup>Data on file.



The Merit Medical Rad Board Xtra is a rigid PVC board designed to be used in conjunction with the Merit Medical Rad Board<sup>®</sup> (sold separately). The Rad Board Xtra allows 90° perpendicular extension of the patient's arm during access and provides an additional 11" (28 cm) of working space when placed next to the Rad Board. The Rad Board Xtra is reversible, reusable, and non-sterile. Sold individually.

Catalogue Number RBX



Rad Board

AERIT / Spice

\*Xenolite® is a registered trademark of Life Tech, Inc.

#### RAD TRAC®

The Merit Medical Rad Trac is made of rigid PVC and is designed to be used in conjunction with the Merit Medical Rad Board<sup>®</sup> (sold separately). The Rad Trac facilitates placement of the Rad Board with a patient already on the procedure table. The Rad Trac is reusable and non-sterile. Sold individually.

Catalogue Number RT913





#### RAD REST®

The Merit Medical Rad Rest is an adjustable stabilisation and positioning cushion used to hyperextend the wrist for radial access and support the forearm/elbow during procedures. Easily adjusts to accommodate any upper extremity length. Made of soft foam for increased patient comfort. The Rad Rest is disposable and non-sterile. Individually packaged, 10 units per box.

#### Catalogue Number RR811



# MERIT ADVANCE® ANGIOGRAPHIC NEEDLES

The Merit Advance angiographic needle has a unique hub design with an ergonomic feel and an arrow that clearly orients the bevel. Its increased sharpness facilitates entry into tissue and vessel walls and was designed for smooth guide wire insertion and removal of the needle over the wire.

Catalogue Number	Gauge	Wall Thickness	Accepts Guide Wire	Length (cm)	Length (inches)	Finish
ONE-WALL STY	/LE NEEDLE			<u>₽</u> ∑		
AD18T51W	18	Thin	.038″ (0.97 mm)	5.0	2	Smooth
AD18T71W	18	Thin	.038" (0.97 mm)	7.0	2 3/4	Smooth
AD18T71W-E	18	Thin	.038" (0.97 mm)	7.0	2 3/4	Echo
AD18T71WT	18	Thin	.038" (0.97 mm)	7.0	2 3/4	Smooth
AD18N91W	18	Normal	.038" (0.97 mm)	9.0	3 1/2	Smooth
AD19U41W	19	Ultra	.035" (0.89 mm)	4.0	1 1/2	Smooth
AD19U51W	19	Ultra	.035" (0.89 mm)	5.0	2	Smooth
AD19U71W	19	Ultra	.035" (0.89 mm)	7.0	2 3/4	Smooth
AD20T41W	20	Thin	.025" (0.64 mm)	4.0	1 1/2	Smooth
AD20T71W	20	Thin	.025" (0.64 mm)	7.0	2 3/4	Smooth
AD21T21W	21	Thin	.021" (0.53 mm)	2.5	1	Smooth
AD21T41W	21	Thin	.021" (0.53 mm)	4.0	1 1/2	Smooth
AD21T41W-E	21	Thin	.021" (0.53 mm)	4.0	1 1/2	Echo
AD21T71W	21	Thin	.021" (0.53 mm)	7.0	2 3/4	Smooth
AD21T71W-E	21	Thin	.021" (0.53 mm)	7.0	2 3/4	Echo
AD21T91W	21	Thin	.021" (0.53 mm)	9.0	3 1/2	Smooth
AD21T91W-E	21	Thin	.021" (0.53 mm)	9.0	3 1/2	Echo
AD21T91R*	21	Thin	.021" (0.53 mm)	9.0	3 1/2	Smooth
AD21T91RE*	21	Thin	.021" (0.53 mm)	9.0	3 1/2	Echo

#### ONE-WALL NEEDLE WITH SELDINGER SHIELD

AD18T51WS	18	Thin	.038" (0.97 mm)	5.0	2	Smooth
AD18T71WS	18	Thin	.038" (0.97 mm)	7.0	2 3/4	Smooth
AD19U71WS	19	Ultra	.035" (0.89 mm)	7.0	2 3/4	Smooth

#### ONE-WALL NEEDLE WITH COURNAND SHIELD

				0		
AD18T71WC	18	Thin	.038" (0.97 mm)	7.0	2 3/4	Smooth
AD19U41WC	19	Ultra	.035" (0.89 mm)	4.0	1 1/2	Smooth
AD19U71WC	19	Ultra	.035" (0.89 mm)	7.0	2 3/4	Smooth
AD21T41WC	21	Thin	.038" (0.97 mm)	4.0	1 1/2	Smooth

\*Available 10 per box, 4 boxes per case; all other needles packaged 25 per box, 4 boxes per case.



#### AD21T71W-E

Merit Advance® Angiographic Needle One-wall style needle, 21 gauge, with echo-enhanced finish

#### AD18T51WS

Merit Advance® Angiographic Needle One-wall style needle with Seldinger shield, 18 gauge, with smooth finish

#### AD18T71WC

Merit Advance® Angiographic Needle One-wall style needle with Cournand shield, 18 gauge, with smooth finish

# SECURELOC® SAFETY INTRODUCER NEEDLES

The unique design of the SecureLoc needle allows clinicians to easily activate a low profile safety mechanism, shielding the needle bevel after use. The hub of this introducer needle is transparent for visibility and designed with an ergonomic feel for ease of handling.

Catalogue Number	Gauge	Wings	Accepts Guide Wire	Length (cm)	Length (inches)	
SL18T71W	18	w/o wings	0.038" (0.97 mm)	7.0	2 3/4	
SL18T71WS	18	with wings	0.038" (0.97 mm)	7.0	2 3/4	
SL21T71W	21	w/o wings	0.021" (0.53 mm)	7.0	2 3/4	
SL21T71WS	21	with wings	0.021" (0.53 mm)	7.0	2 3/4	

WITHOUT WINGS

WITH WINGS




SecureLoc® is a registered trademark of Bard Access Systems, Inc.

Merit Medical is a global company. Not all goods in this catalogue are available in every country. Terms and conditions may vary. Contact your local Sales Representative for more details.

# ACCESS

# FUTURA® SAFETY SCALPELS

Automated retractable safety scalpels designed to protect clinicians and patients from accidental cuts during passing and disposal. Packaged 50 units per box, 2 boxes per case.

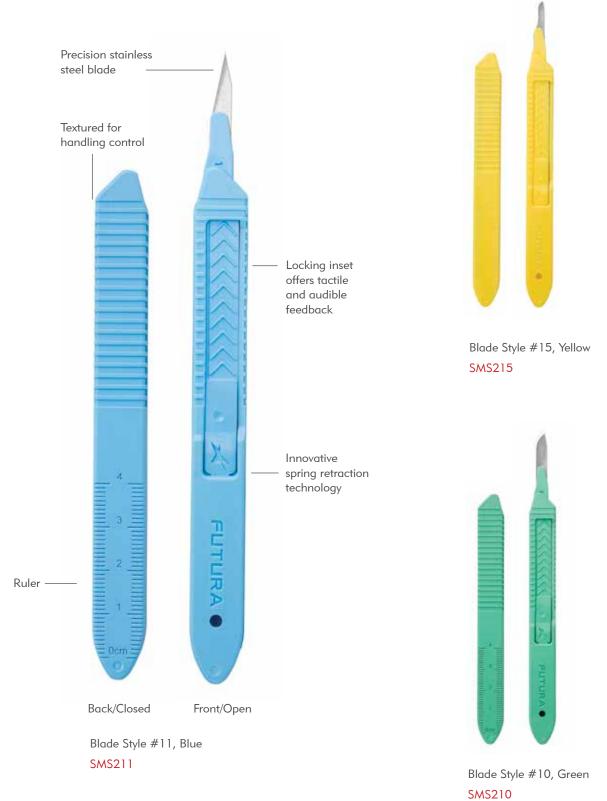

Catalogue

	Number	Description	Colour		
	SMS210	#10 Blade Style	green		
SMS215 #15 Blade Style vellow	SMS211	#11 Blade Style	blue		
	SMS215	#15 Blade Style	yellow		

# PRELUDEEASE<sup>™</sup> HYDROPHILIC SHEATH INTRODUCERS

The new line of PreludeEASE hydrophilic sheath introducers facilitates smooth insertion and removal while minimising the potential for spasm.

#### **KIT INCLUDES:**

- PreludeEASE sheath and dilator
- Merit Advance<sup>®</sup> needle or two-part needle
- Guide Wire
- BowTie<sup>™</sup> guide wire insertion device (only included in kits with 0.018" guide wire)

Custom kits available.




Packaged in tray; 5 per box. Guide Wire Diameter 0.018"=0.46 mm 0.021"=0.53 mm 0.025"=0.64 mm 0.035"=0.89 mm NT=Nitinol PD=Palladium SS=Stainless Steel DE=Double Ended, Straight/3mm J \* Includes thumb scalpel and 3 mL syringe.

Merit Medical is a global company. Not all goods in this catalogue are available in every country. Terms and conditions may vary. Contact your local Sales Representative for more details

# PRELUDE® RADIAL SHEATH INTRODUCERS - MINI ACCESS

The Prelude Radial Sheath Introducers for mini access facilitate sheath introducer placement via a small needle (21G or 20G) and small guide wire (0.46 mm or 0.64 mm). The sheaths are available in three lengths, 7 cm, 11 cm, and 23 cm, and are packaged in a holster with the sheath, vessel dilator, guide wire and needle. Products can be used for transradial, brachial and femoral access.



Catalogue	French		Guide Wire	Guide Wire	Needle	Hub
Number	Size	Length	Diameter/Length	Core/Tip	Gauge/Length	Colour
PSI-4F-7-018	4	7 cm	0.018″ (0.46 mm) x 40 cm	SS/SS	21G x 4 cm	red
PSI-5F-7-018	5	7 cm	0.018" (0.46 mm) x 40 cm	SS/SS	21G x 4 cm	gray
PSI-6F-7-018	6	7 cm	0.018" (0.46 mm) x 40 cm	SS/SS	21G x 4 cm	green
PSI-7F-7-018	7	7 cm	0.018" (0.46 mm) x 40 cm	SS/SS	21G x 4 cm	orange
PSI-4F-7-018NT4	4	7 cm	0.018" (0.46 mm) x 40 cm	NT/PT	21G x 4 cm	red
PSI-5F-7-018NT4	5	7 cm	0.018" (0.46 mm) x 40 cm	NT/PT	21G x 4 cm	gray
PSI-6F-7-018NT4	6	7 cm	0.018" (0.46 mm) x 40 cm	NT/PT	21G x 4 cm	green
PSI-4F-11-018	4	11 cm	0.018" (0.46 mm) x 40 cm	SS/SS	21G x 4 cm	red
PSI-5F-11-018	5	11 cm	0.018" (0.46 mm) x 40 cm	SS/SS	21G x 4 cm	gray
PSI-6F-11-018	6	11 cm	0.018" (0.46 mm) x 40 cm	SS/SS	21G x 4 cm	green
PSI-7F-11-018	7	11 cm	0.018" (0.46 mm) x 40 cm	SS/SS	21G x 4 cm	orange
PSI-4F-11-018NT4	4	11 cm	0.018" (0.46 mm) x 40 cm	NT/PT	21G x 4 cm	red
PSI-5F-11-018NT4	5	11 cm	0.018" (0.46 mm) x 40 cm	NT/PT	21G x 4 cm	gray
PSI-6F-11-018NT4	6	11 cm	0.018" (0.46 mm) x 40 cm	NT/PT	21G x 4 cm	green
PRO-4F-11-018NT7*	4	11 cm	0.018" (0.46 mm) x 40 cm	NT/PT	21G x 7 cm	red
PRO-5F-11-018NT7*	5	11 cm	0.018" (0.46 mm) x 40 cm	NT/PT	21G x 7 cm	gray
PRO-6F-11-018NT7*	6	11 cm	0.018" (0.46 mm) x 40 cm	NT/PT	21G x 7 cm	green
PRO-7F-11-018NT7*	7	11 cm	0.018" (0.46 mm) x 40 cm	NT/PT	21G x 7 cm	orange
PSI-4F-23-018NT4	4	23 cm	0.018" (0.46 mm) x 80 cm	NT/PT	21G x 4 cm	red
PSI-5F-23-018NT4	5	23 cm	0.018" (0.46 mm) x 80 cm	NT/PT	21G x 4 cm	gray
PSI-6F-23-018NT4	6	23 cm	0.018" (0.46 mm) x 80 cm	NT/PT	21G x 4 cm	green
PSI-7F-23-018NT4	7	23 cm	0.018" (0.46 mm) x 80 cm	NT/PT	21G x 4 cm	orange
PSI-4F-23-018NT7	4	23 cm	0.018" (0.46 mm) x 80 cm	NT/PT	21G x 7 cm	red
PSI-5F-23-018NT7	5	23 cm	0.018" (0.46 mm) x 80 cm	NT/PT	21G x 7 cm	gray
PSI-6F-23-018NT7	6	23 cm	0.018" (0.46 mm) x 80 cm	NT/PT	21G x 7 cm	green
PSI-4F-7-025	4	7 cm	0.025" (0.64 mm) x 50 cm	-	20G x 4 cm	red
PSI-5F-7-025	5	7 cm	0.025" (0.64 mm) x 50 cm	-	20G x 4 cm	gray
PSI-6F-7-025	6	7 cm	0.025" (0.64 mm) x 50 cm	-	20G x 4 cm	green
PSI-4F-11-025	4	11 cm	0.025" (0.64 mm) x 50 cm	-	20G x 4 cm	red
PSI-5F-11-025	5	11 cm	0.025" (0.64 mm) x 50 cm	-	20G x 4 cm	gray
PSI-6F-11-025	6	11 cm	0.025" (0.64 mm) x 50 cm	-	20G x 4 cm	green

0.25" (0.64 mm) guide wire is stainless steel; double ended (3 mm J and floppy).

K15-00104	-	-	0.025" (0.64 mm) x 50 cm	-	-	-
K15-00174	6	ll cm	0.018" (0.46 mm) x 45 cm	SC	21G x 4 cm	green
K15-00201**	7	7 cm	0.018" (0.46 mm) x 40 cm	SS/SS	21G x 7 cm	orange


Packaged in holster; 5 per box.

SS=Stainless Steel PT=Platinum Tip NT=Nitinol SC=Spring Coil

\*Includes PreludePRO<sup>™</sup> polypropylene tubing.

\*\*Includes BowTie<sup>™</sup> guide wire insertion device and echo-enhanced needle.

# PRELUDEPRO<sup>™</sup> SHEATH INTRODUCERS

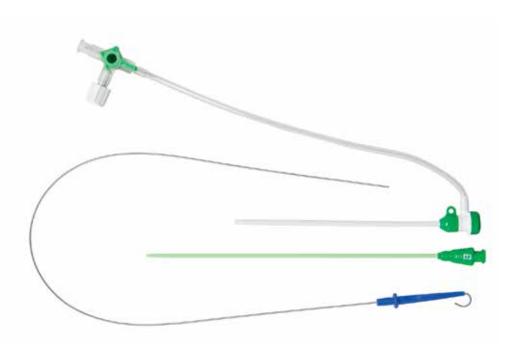


Catalogue	French		Guide Wire	Hub
Number	Size	Length	Diameter/Length	Colour
PRO-4F-11-035	4	ll cm	0.035" (0.89 mm) x 50 cm	red
PRO-5F-11-035	5	ll cm	0.035″ (0.89 mm) x 50 cm	gray
PRO-6F-11-035	6	11 cm	0.035″ (0.89 mm) x 50 cm	green
PRO-7F-11-035	7	11 cm	0.035" (0.89 mm) x 50 cm	orange
PRO-8F-11-035	8	11 cm	0.035" (0.89 mm) x 50 cm	blue
PRO-5F-11-038	5	11 cm	0.038" (0.97 mm) x 50 cm	gray
PRO-6F-11-038	6	11 cm	0.038" (0.97 mm) x 50 cm	green
PRO-7F-11-038	7	11 cm	0.038" (0.97 mm) x 50 cm	orange
PRO-8F-11-038	8	11 cm	0.038" (0.97 mm) x 50 cm	blue
PRO-4F-11	4	11 cm	N/A	red
PRO-5F-11	5	11 cm	N/A	gray
PRO-6F-11	6	11 cm	N/A	green
PRO-7F-11	7	11 cm	N/A	orange
PRO-8F-11	8	11 cm	N/A	blue

Packaged in holster; 5 per box

# PRELUDE SHEATH INTRODUCERS WITH MERIT ADVANCE® NEEDLE

The Prelude Sheath Introducers with Merit Advance needle include the sheath introducer, vessel dilator, guide wire and access needle all packaged in a holster.

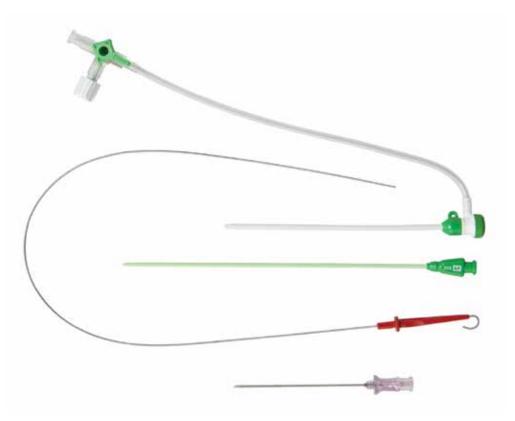


Catalogue Number	French Size	Length	Guide Wire Diameter/Length	Needle Gauge/Length	Hub Colour
PSI-5F-11-035-18G	5	11 cm	0.035" (0.89 mm) x 50 cm	18G x 7 cm	arav
PSI-6F-11-035-18G	6	11 cm	0.035" (0.89 mm) x 50 cm	18G x 7 cm	gray green
PSI-7F-11-035-18G	7	11 cm	0.035" (0.89 mm) x 50 cm	18G x 7 cm	orange
PSI-8F-11-035-18G	8	11 cm	0.035" (0.89 mm) x 50 cm	18G x 7 cm	blue
PSI-5F-11-038-18G	5	11 cm	0.038" (0.97 mm) x 50 cm	18G x 7 cm	gray
PSI-6F-11-038-18G	6	11 cm	0.038" (0.97 mm) x 50 cm	18G x 7 cm	green
PSI-7F-11-038-18G	7	ll cm	0.038″ (0.97 mm) x 50 cm	18G x 7 cm	orange
PSI-8F-11-038-18G	8	11 cm	0.038" (0.97 mm) x 50 cm	18G x 7 cm	blue
PRO-5F-11-038-18G*	5	ll cm	0.038" (0.97 mm) x 50 cm	18G x 7 cm	gray
PRO-6F-11-038-18G*	6	11 cm	0.038" (0.97 mm) x 50 cm	18G x 7 cm	green

Packaged in holster; 5 per box. \*PreludePRO<sup>™</sup> (polypropylene) tubing.

# PRELUDE SHEATH INTRODUCERS 11 CM

The Prelude Sheath Introducer 11 cm offers excellent transitions, smooth insertions and more. Features a haemostasis valve to minimise blood leakage and facilitates the insertion and withdrawal of devices. Packaged in a holster that keeps all components secure, especially the guide wire. Components can be flushed while in the holster. Guide wires are double ended, stainless steel, with a 3 mm J end and a floppy straight end. Product includes a vessel dilator, sheath introducer and guide wire (also available without guide wire).

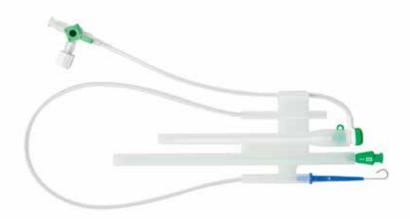

Catalogue	French	1 .1	Guide Wire	Hub
Number	Size	Length	Diameter/Length	Colour
PSI-4F-11-035	4	11 cm	0.035″ (0.89 mm) x 50 cm	red
PSI-5F-11-035	5	11 cm	0.035″ (0.89 mm) x 50 cm	gray
PSI-6F-11-035	6	11 cm	0.035" (0.89 mm) x 50 cm	green
PSI-7F-11-035	7	11 cm	0.035" (0.89 mm) x 50 cm	orange
PSI-8F-11-035	8	11 cm	0.035" (0.89 mm) x 50 cm	blue
PSI-5F-11-038	5	11 cm	0.038" (0.97 mm) x 50 cm	gray
PSI-6F-11-038	6	11 cm	0.038" (0.97 mm) x 50 cm	green
PSI-7F-11-038	7	11 cm	0.038″ (0.97 mm) x 50 cm	orange
PSI-8F-11-038	8	11 cm	0.038″ (0.97 mm) x 50 cm	blue
PSI-4F-11	4	11 cm	N/A	red
PSI-5F-11	5	11 cm	N/A	gray
PSI-6F-11	6	11 cm	N/A	green
PSI-7F-11	7	11 cm	N/A	orange
PSI-8F-11	8	11 cm	N/A	blue

Packaged in holster; 5 per box.

# PRELUDE SHEATH INTRODUCERS 23 CM

The Prelude Sheath Introducer 23 cm offers excellent transitions, smooth insertions and more. Features a haemostasis valve to minimise blood leakage and facilitates the insertion and withdrawal of devices. Packaged in a holster that keeps all components secure, especially the guide wire. Components can be flushed while in the holster. Guide wires are double ended, stainless steel, with a floppy 3 mm J end and a floppy straight end. Product includes a vessel dilator, sheath introducer and guide wire (also available without guide wire).




Catalogue	French		Guide Wire	Hub
Number	Size	Length	Diameter/Length	Colour
PSI-4F-23-035	4	23 cm	0.035″ (0.89 mm) x 80 cm	red
PSI-5F-23-035	5	23 cm	0.035" (0.89 mm) x 80 cm	gray
PSI-6F-23-035	6	23 cm	0.035" (0.89 mm) x 80 cm	green
PSI-7F-23-035	7	23 cm	0.035" (0.89 mm) x 80 cm	orange
PSI-8F-23-035	8	23 cm	0.035" (0.89 mm) x 80 cm	blue
PSI-5F-23-038	5	23 cm	0.038" (0.97 mm) x 80 cm	gray
PSI-6F-23-038	6	23 cm	0.038" (0.97 mm) x 80 cm	green
PSI-7F-23-038	7	23 cm	0.038" (0.97 mm) x 80 cm	orange
PSI-8F-23-038	8	23 cm	0.038" (0.97 mm) x 80 cm	blue
PSI-4F-23	4	23 cm	N/A	red
PSI-5F-23	5	23 cm	N/A	gray
PSI-6F-23	6	23 cm	N/A	green
PSI-7F-23	7	23 cm	N/A	orange
PSI-8F-23	8	23 cm	N/A	blue

Packaged in holster; 5 per box.

# PRELUDE ACT<sup>™</sup> SHEATH INTRODUCERS

The half-size (.5F larger) Prelude ACT (Activated Clotting Time) sheaths allow easy blood draw through sheath side arm with or without catheter in place.

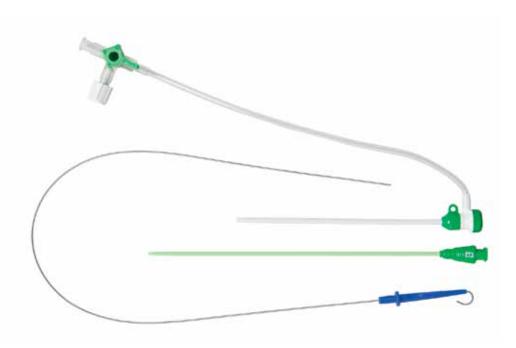

Catalogue	French		Guide Wire	Hub	
Number	Size	Length	Diameter/Length	Colour	
PSI-4F-11-035ACT	4.5	11 cm	0.035" (0.89 mm) x 50 cm	red	
PSI-5F-11-038ACT	5.5	ll cm	0.038" (0.97 mm) x 50 cm	gray	
PSI-6F-11-038ACT	6.5	ll cm	0.038″ (0.97 mm) x 50 cm	green	
PSI-7F-11-038ACT	7.5	11 cm	0.038" (0.97 mm) x 50 cm	orange	
PSI-8F-11-038ACT	8.5	11 cm	0.038" (0.97 mm) x 50 cm	blue	
PSI-4F-11ACT	4.5	ll cm	N/A	red	
PSI-5F-11ACT	5.5	11 cm	N/A	gray	
PSI-6F-11ACT	6.5	11 cm	N/A	green	
PSI-7F-11ACT	7.5	ll cm	N/A	orange	
PSI-8F-11ACT	8.5	ll cm	N/A	blue	

Packaged in holster; 5 per box. All ACT Sheaths use PreludePRO<sup>™</sup> (polypropylene) tubing.

# PRELUDE® OBTURATORS

Prelude Obturators provide support as well as optimal flow for monitoring a patient's blood pressure when sheath is left in place. Blood can be drawn from sheath side arm with obturator in place, avoiding additional venipunctures.

Catalogue Number	French Size	Length	Recommended Sheath Size	Hub Colour	
OBTURATORS		J			
OBT-4F-11	4	13 cm	5F x 11 cm	red	
OBT-5F-11	5	13 cm	6F x 11 cm	gray	
OBT-6F-11	6	13 cm	7F x 11 cm	green	
OBT-7F-11	7	13 cm	8F x 11 cm	orange	
OBT-4F-23	4	25 cm	5F x 23 cm	red	
OBT-5F-23	5	25 cm	6F x 23 cm	gray	
OBT-6F-23	6	25 cm	7F x 23 cm	green	
OBT-7F-23	7	25 cm	8F x 23 cm	orange	

Packaged in pouch; 10 per box.

# PRELUDE<sup>®</sup> GUIDE WIRES

Prelude Guide Wires are coiled uncoated stainless steel and are offered as standalone products, packaged in a flush hoop for your convenience.

Catalogue		Guide Wire
Number	Length	Diameter/Length
SW35DE50SST	50 cm	0.035″ (0.89 mm)
SW38DE50SST	50 cm	0.038" (0.97 mm)
SW35DE80SST	80 cm	0.035" (0.89 mm)
SW38DE80SST	80 cm	0.038" (0.97 mm)

Packaged in hoop; 10 per box.

